


iblinds

Quick Start Guide

For detailed installation instructions and installation video guides visit our website www.myiblinds.com/support.

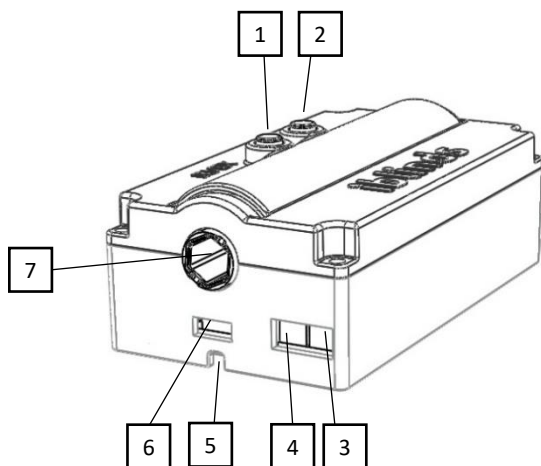


iblinds Motor

1.	Z-Wave Include / Exclude Button
2.	Calibration Reset Button
3.	Battery Connector
4.	Solar Connector
5.	String Pass-Through Channel
6.	Micro USB Connector
7.	iblinds Motor Tilt Shaft

iblinds Kit Check list

	iBlind motor
	Height Adapter
	Tilt Shaft
	Battery
	Charge Adapter and Clip
	USB Adapter
	USB Charging Power Cable
	Hex Wrench

WINDOW BLIND COMPONENTS

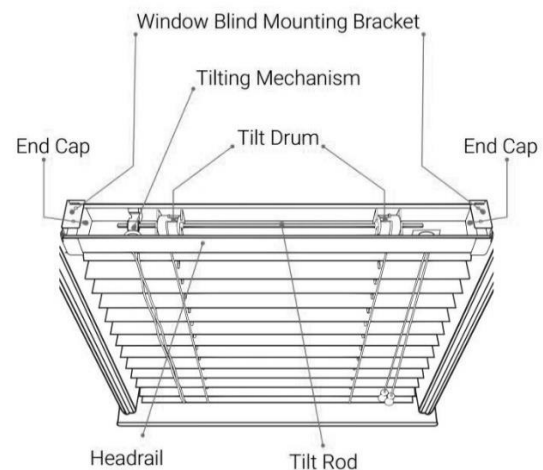


Window Blind Components

1.	Window Blind Mounting Bracket
2.	End Cap
3.	Tilting Mechanism
4.	Tilt Drum
5.	Tilt Rod
6.	Headrail

Installation


Step 1

Remove existing blind.

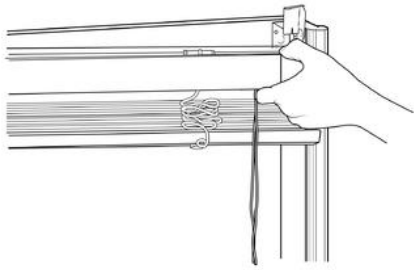


Step 2

Remove existing tilt mechanism.




Step 3

Remove tilt rod from headrail.

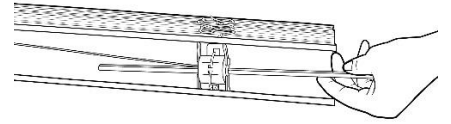


Step 4

Install charge adapter inside headrail and attach clip from bottom. Wires should be facing outer end of blind. Micro USB port facing front.




Step 5

Select tilt shaft to match tilt rod size & shape. Remove lid using included hex wrench & install appropriate tilt shaft. Replace lid.

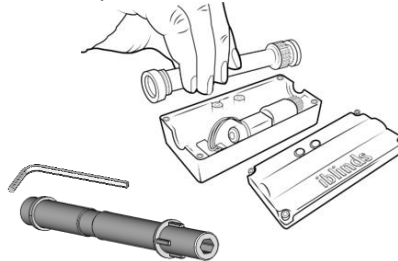

Step 6


Connect battery cable to the orange BAT port. Connect Charge adapter cable to the USB port.



*For more power options visit our support website - support.myiblands.com


Step 7

Install iblands motor in headrail with buttons at the back. Make sure tilt shaft is aligned with holes in tilt drums. If needed, use included height adapter.

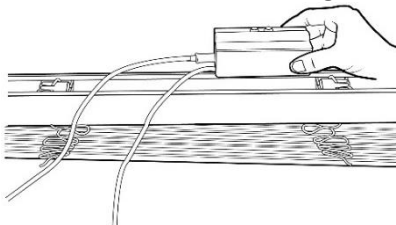

Step 8

Re-Insert tilt rod, rotating it to pass through the shaft. Be careful to keep all tilt drums in the same orientation.

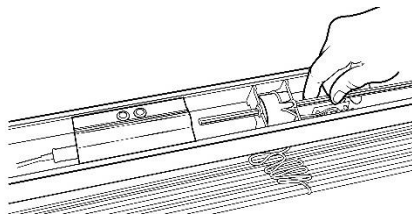




Step 9

Carefully tuck the cables into the headrail. Take care to route the hidden cables where they won't interfere with the tilt rod or any of the other moving mechanisms in the headrail.

Step 10

Follow your Z-Wave controller's directions to place it in inclusion mode. Make sure iblands device is powered on. Press the inclusion button once. Wait for the device to be discovered and joined to the Z-Wave network.



Power Option A	Connection	Power Option B	Connection
Rechargeable Battery , Use USB Cable and Power Adapter to charge battery approx. every 3-4 months	- Battery to iblands motor  Charger with USB Cable and Adapter 	Direct Power Bypass Power Connector 5V 2A, DC	- USB Cable and Power Adapter Directly to iblands motor 